



ASELight 160/120 MOBILE STAND

LED SURGICAL LIGHT


Unique coverage of varied and highest lighting requirements, now available as mobile stand version for more flexibility.

asetronics 
Advanced Swiss Electronics

Technical Specifications ASELight 160

Intensity of illumination E_c @ 100 cm	160,000 lux
Light field diameter	220 mm / 300 mm
Colour temperature	4000 K / 4500 K / 5000 K
Power supply	24 VDC \pm 2 V
Power consumption	Max. 95 W (typ. < 90 W)
IP protection class (light)	IP54
IP protection class (mobile stand)	IP20
Weight with mobile stand (Incl. UPS)	62 kg
Dimensions (light only)	600 mm x 600 mm x 100 mm

ASELight160 - Mobile Stand

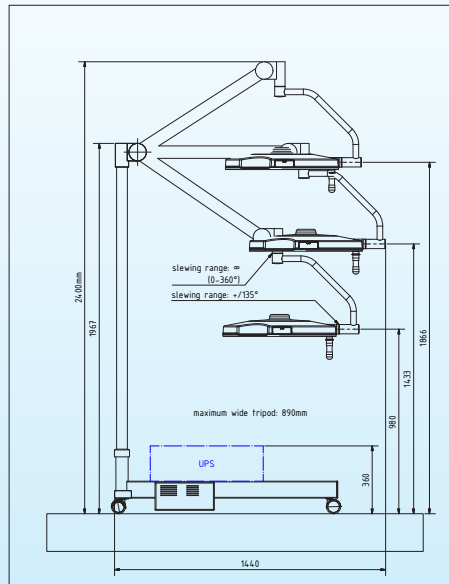


- » Uninterruptible Power Supply (UPS)
- » Battery operating > 4 hours

Technical Specifications ASELight 120

Intensity of illumination E_c @ 100 cm	120,000 lux
Adjustable light field diameter	180 mm / 240 mm
Colour temperature	4000 K / 4500 K / 5000 K
Power supply	24 VDC \pm 2 V
Power consumption	Max. 55 W (typ. < 50 W)
IP protection class (light)	IP54
IP protection class (mobile stand)	IP20
Weight with mobile stand (Incl. UPS)	59 kg
Dimensions (light only)	500 mm x 500 mm x 80 mm

ASELight120 - Mobile Stand

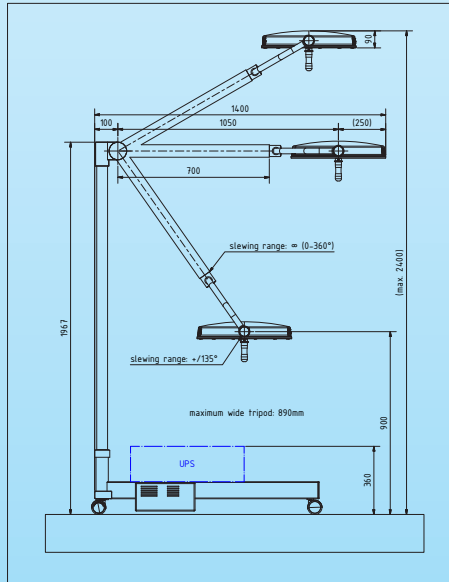

- » Uninterruptible Power Supply (UPS)
- » Battery operating > 4 hours

asetronics 

Advanced Swiss Electronics

Freiburgstrasse 251

3018 Bern

Switzerland

Internet: www.aselight.ch

www.asetronics.ch

Telephone: +41 (0)31 329 32 19

Telefax: +41 (0)31 329 31 22

E-mail: info@asetronics.ch

CE



(Version 08/2017)